




➤ **GazControl** ® allows a safe transport on site of sampled gas from sampling point to the lab.

➤ **Description :**

- 1 cylinder 1000cc SS 304L, with 2 spindle valves; 2 flexible hoses SS/PTFE and quick connections fittings; 1 manometer for pressure control.
- Maximum pressure admitted according to the European Transportable Pressure Equipment Directive TPED 99/36/CE : 100 bar. The cylinder is hydrostatically tested at 1.5 times the pressure rating.

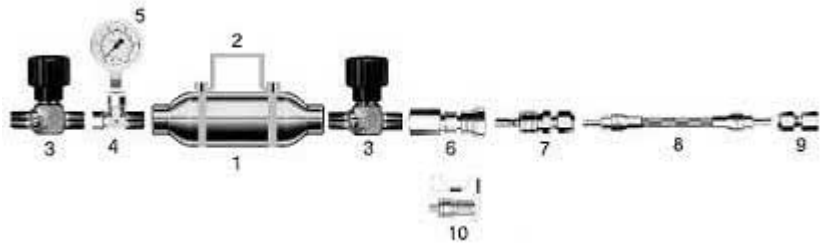

- 1 - Sampling cylinder**
- 2 - Transport handle**
- 3 - Spindel valve**
- 4 - T fitting**
- 5 - Pressure indicator**
- 6 - Quick connection fitting F**
- 7 - Quick connection fitting M**
- 8 - Flexible hose**
- 9 - Female fitting - 1/4 or 3/8" NPT**
- 10 - Quick coupling protection cap**

